


PIN ASSIGNMENT

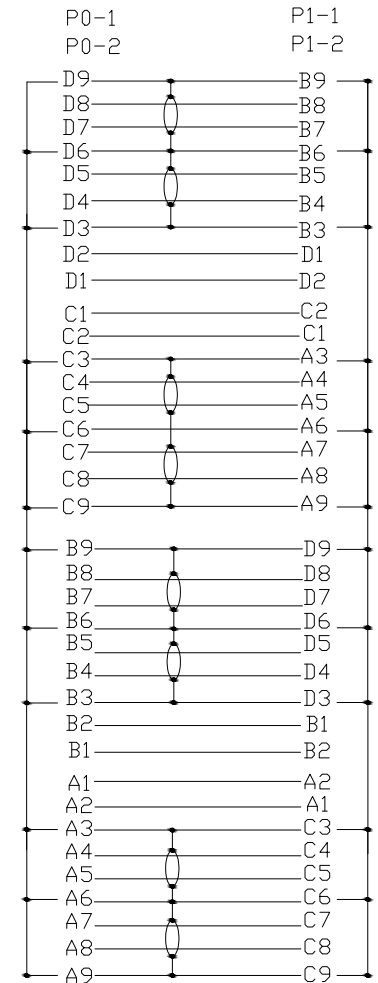

NOTE:
 1.100% OPEN & SHORT TESTIGN,
 2.INSULATION RESISTANCE 10M Ohm MIN DC300V
 3.CONDUCTIVE RESISTANCE: 2 Ohm MAX

9	EXPANDD	AQ-3-MS76001	PET BALCK OD: 10mm	A/R	mm						
8	MOLDING	AQ-3-GL10501	PA BLACK	A/R	g						
7	ACETATE TAPE	AQ-3-MS77001	W=25±5mm	A/R	mm						
6	PCB	AQ-3-MS31023	MINISAS HD 4I PCB(A/B),PIN: AU 15u&30u,100±10 ohm	4	PCS						
5	PCB	AQ-3-MS31022	MINISAS HD 4I PCB(C/D),PIN: AU 15u&30u,100±10 ohm	4	PCS						
4	COVER	AQ-3-MS64002	MINISAS HD 8I COVER, PC BLACK	2	PCS						
3	HOUSING	AQ-3-MS64001	MINISAS HD 8I HOUSING, PC BLACK	2	PCS						
2	CABLE	AQ-3-MS20101	30AWG CABLE	A/R	mm						
1	CABLE	AQ-3-MS40206	(30AWG*2C+2d)*AI+MYLAR,OD:0.97*2.17MM,100±10 ohm	A/R	mm						
ND.	PART NAME	PART NO.	SPEC DESCRIPTION	QT'Y	UNIT						
						TOLERANCE INCHES		M/M		DIKWAN® DONGGGUAN AIQUN INDUSTRIAL CO., LTD.	
						.X	.015	.30			
						.XX	.010	.10			
						.XXX	.005	.05			
						DRAWN BY		TONY CHAN		SCALE	NONE
						CHECK BY				UNIT	MM
						CUSTOMER. P/N:		P/N: AQ-1-MSBB1010500		SHEET	1/1
						REV		A		DATE	22/06/27
						INITIAL RELEASE		13/03/02		COSTOMER:	
						DESCRIPTION OF CHANGE				DWG NO.:AQ13-021	
						DATE		22/06/27		TITLE: MINI SAS HD 8i TO 8i	