



RoHS

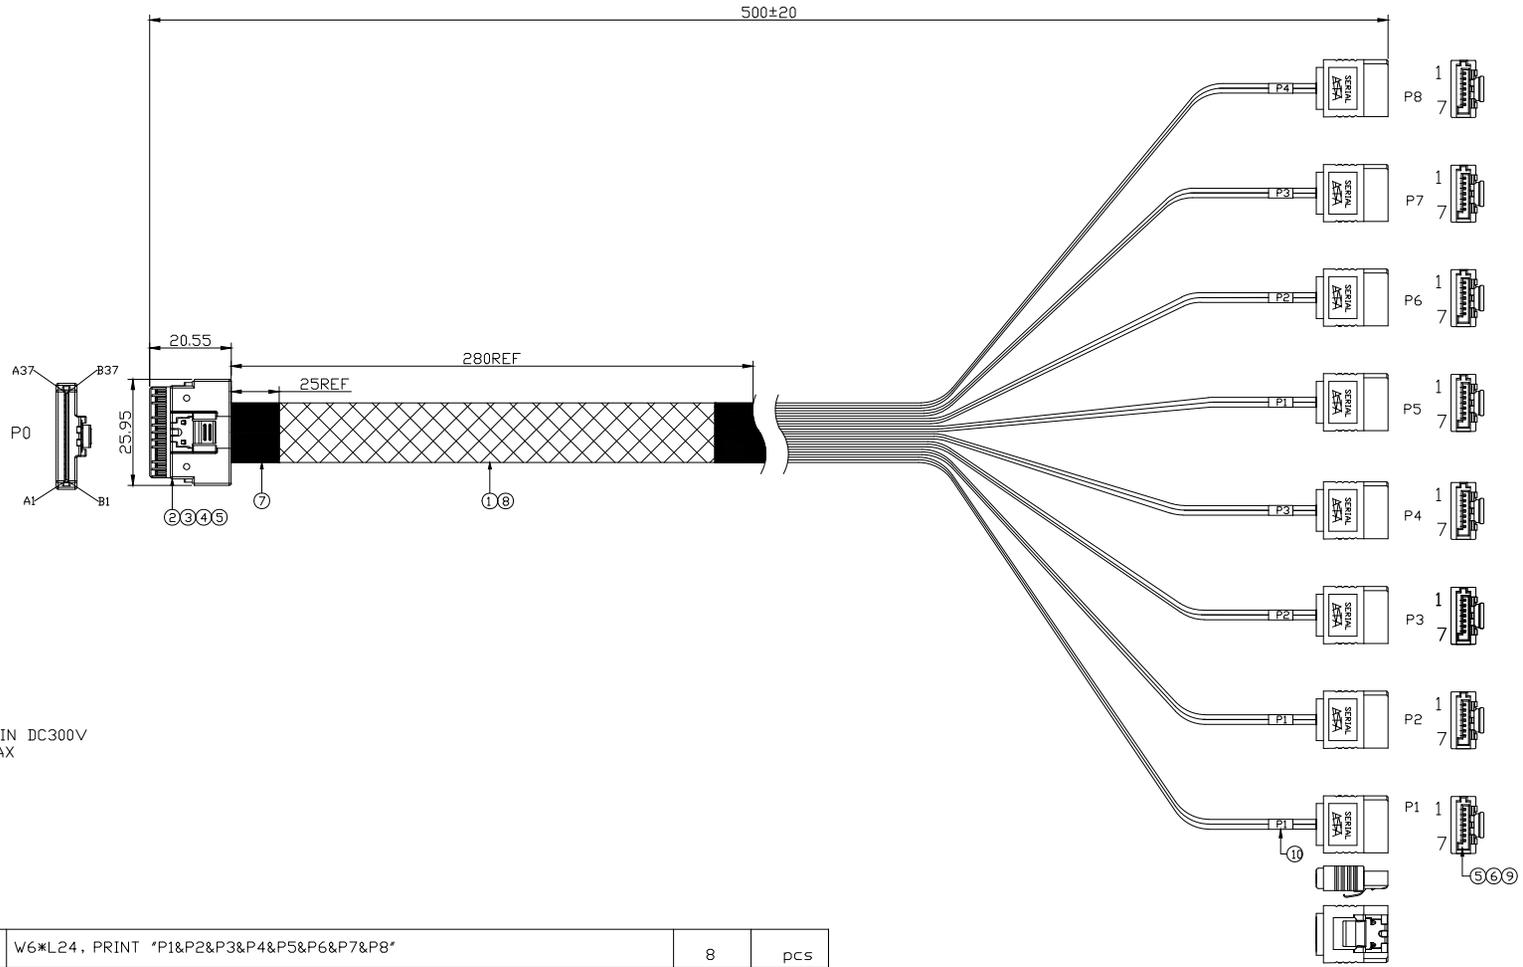


NOTE:  
 1.100%OPEN&SHORT TESTIGN,  
 2.INSULATION RESISTANCE 10M Ωhm MIN DC300V  
 3.CONDUCTIVE RESISTANCE: 2 Ωhm MAX

10	LABLE	AQ-5-MS5039	W6*L24, PRINT "P1&P2&P3&P4&P5&P6&P7&P8"	8	pcs
9	CONN.	AQ-3-GL51S01	SATA 7P/F,PIN:G/F	8	pcs
8	EXPANDD	AQ-3-MS76001	PET BALCK OD: 10mm	A/R	mm
7	ACETATE TAPE	AQ-3-MS77001	W=25±5mm,BLACK	2	pcs
6	MOLDING	AQ-3-GL145201	45P PVC BLACK	A/R	g
5	MOLDING	AQ-3-GL100101	LDPE,NATURAL	A/R	g
4	MOLDING	AQ-3-GL100401	PBT+30%GF BLACK	A/R	g
3	LATCH	AQ-3-MS21008	STAINLESS STEEL	9	pcs
2	PCB	AQ-3-MS31019	SLIMSAS 8I PCB, PIN:Au 15u+30u, 88±8 ohm	1	PCS
1	CABLE	AQ-3-MS40208	(32AWG*2C+2d)*AL+MYLAR,OD:0.67*1.54MM,85±5 ohm.	A/R	mm
NO.	PART NAME	PART NO.	SPEC DESCRIPTION	QT'Y	UNIT

A	INITIAL RELEASE		13/03/02		
REV	DESCRIPTION OF			DATE	
TOLERANCE CHANGE			<b>DIKWAN</b> ® DONGGUAN AIQUN INDUSTRIAL CO., LTD. SCALE NONE UNIT MM SHEET 1/2 CUSTOMER: DATE 21/11/22 DWG NO.: TITLE: SLIMSAS 8I TO 8*SATA		
MM	.X	.015			.30
	.XX	.010			.10
	.XXX	.005			.05
DRAWN BY	TONY CHAN		REV	A	
CHECK BY			CUSTOMER P/N: P/N:AQ-1-MSAS810500		

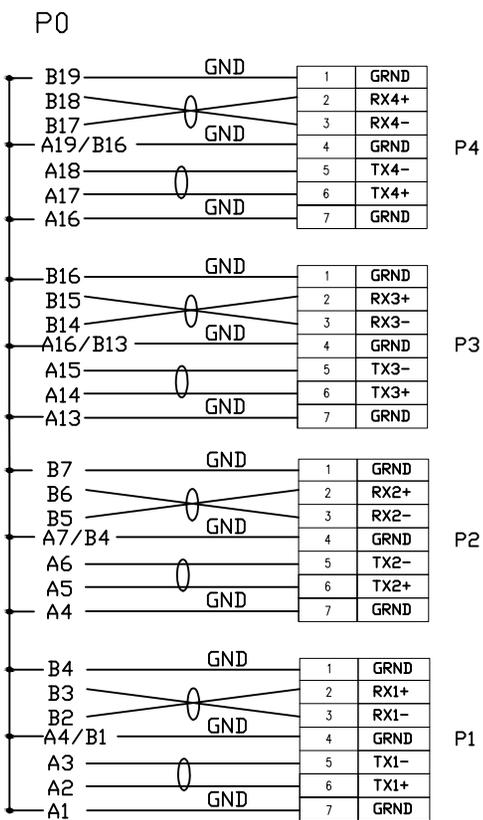

NC:A8,A9,A10,A11,A12,  
B8,B9,B10,B11,B12

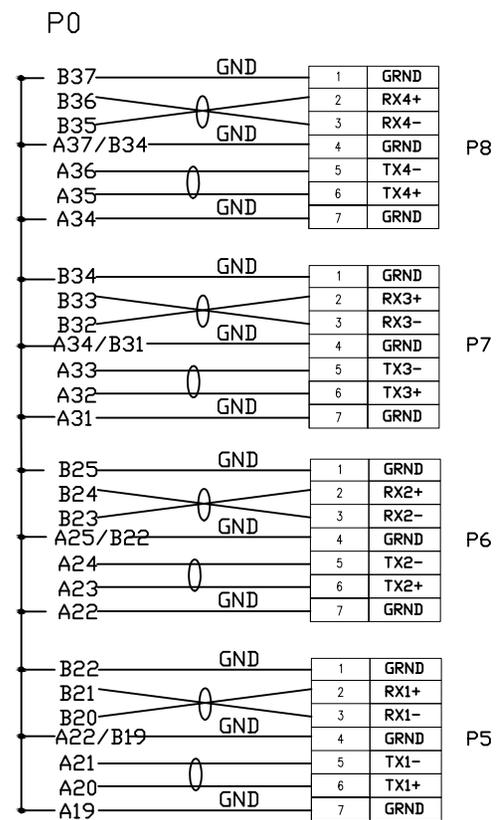

NC:A26,A27,A28,A29,A30,A31  
B26,B27,B28,B29,B30,B31

A	INITIAL RELEASE		13/03/02	
REV	DESCRIPTION OF			DATE
TOLERANCE CHANGE		INCHES		
MM	.X	.015	.30	<b>DIKWAN</b> <sup>®</sup> DONGGUAN AIQUN INDUSTRIAL CO., LTD.
	.XX	.010	.10	
	.XXX	.005	.05	
DRAWN BY	TONY CHAN		SCALE	NONE
CHECK BY			UNIT	MM
			SHEET	2/2
			DATE	21/11/22
			CUSTOMER:	
			TITLE:	SLIMSAS 8I TO 8*SATA
CUSTOMER P/N:			P/N:AQ-1-MSAS810500	