


- ELECTRICAL CHARACTER:
- a. 100% OPEN&SHORT TESTING;
 - b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
 - c. INSULATION RESISTANCE:10M Ohm(Min);
 - d. CONDUCTIVE RESISTANCE:2 Ohm(Max).

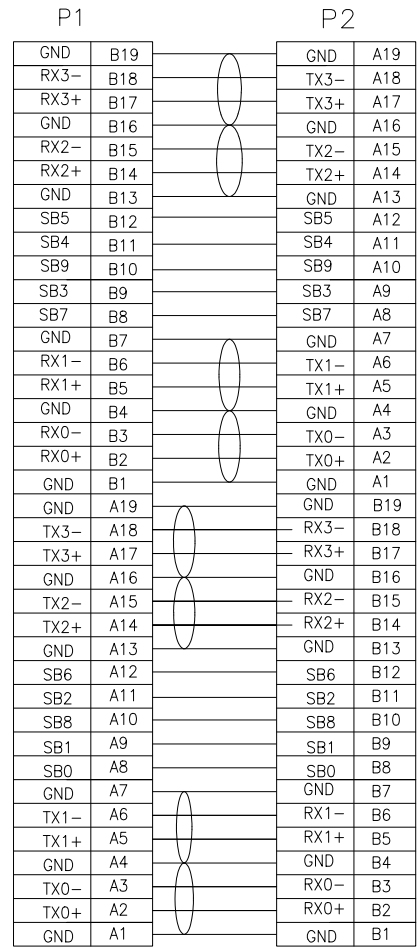

| NO. | PART NAME | PART NO. | SPEC DESCRIPTION | QTY | UNIT |
|-----|--------------|---------------|------------------------------------------------|-----|------|
| 8 | LATCH | AQ-3-MS21008 | STAINLESS STEEL | 2 | pcs |
| 7 | EXPANDD | AQ-3-MS76001 | PET BALCK OD: 10mm | A/R | mm |
| 6 | ACETATE TAPE | AQ-3-MS77001 | W=25±5mm,BLACK | 25 | mm |
| 5 | MOLDING | AQ-3-GL100101 | LDPE,NATURAL | A/R | 9 |
| 4 | MOLDING | AQ-3-GL100401 | PBT+30GF% BLACK | A/R | 9 |
| 3 | PCBA | AQ-3-MS31019 | SLIMSAS 4I PCB, PIN:15u&30u Au, 88±8 ohm | 2 | PCS |
| 2 | CABLE | AQ-3-MS40101 | 30AWG CABLE,OD:0.65 | A/R | mm |
| 1 | CABEL | AQ-3-MS40208 | (32AWG*2C+2D)AL+MYLAR,OD:0.65*1.54MM,85±5 ohm. | A/R | mm |

| TOLERANCE | | | INCHES | | M/M | | DIKWAN® DONGGUAN AIQUN INDUSTRIAL CO., LTD. | | | | |
|--------------------|------|-----|--------|--|---------------------|--|---------------------------------------------|------|-----------|-----|----|
| .X | .015 | .30 | | | | | SCALE | NONE | | REV | A0 |
| .XX | .010 | .10 | | | | | UNIT | MM | | | |
| .XXX | .005 | .05 | | | | | SHEET | 1/1 | COSTOMER: | | |
| DRAWN BY TONY CHAN | | | DATE | | 16/07/02 | | DWG NO.:AQ1607-0214A | | | | |
| CHECK BY | | | TITLE: | | SLIMSAS 4I TO 4I RA | | | | | | |
| APPD BY | | | P/N: | | AQ-1-MS991R10500 | | | | | | |