
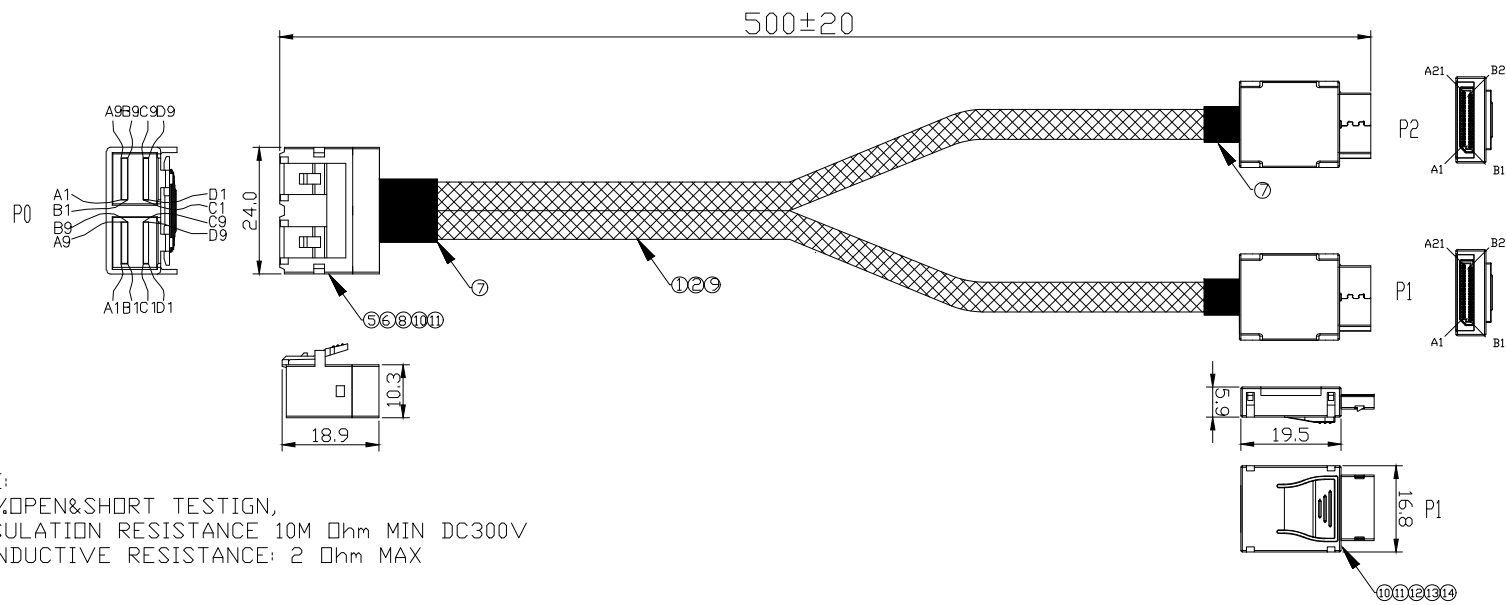


PIN ASSIGNMENT

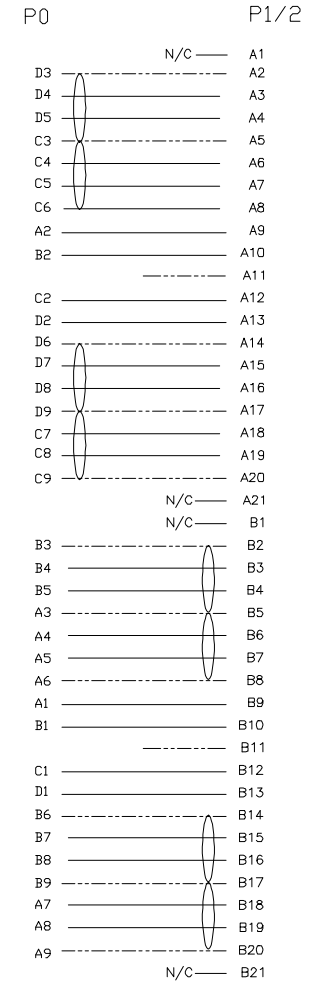

NOTE:
 1.100%OPEN&SHORT TESTIGN,
 2.INSULATION RESISTANCE 10M Ωhm MIN DC300V
 3.CONDUCTIVE RESISTANCE: 2 Ωhm MAX

| | | | | | |
|-----|--------------|--------------|---|------|------|
| 14 | MOLDING | AQ-3-GL10101 | LDPE NATURAL | A/R | g |
| 13 | CONN | AQ-3-MS51C02 | □CULINK 4I CONN PIN:Au 15u | 2 | PCS |
| 12 | PCB | AQ-3-MS31022 | □CULINK 4I PCB 88±8 ohm | 2 | PCS |
| 11 | HOOK | AQ-3-MS64002 | □CULINK 4I HOOK_UP PC+ABS, BLACK | 2 | PCS |
| 10 | HOOK | AQ-3-MS64001 | □CULINK 4I HOOK_DOWN PC+ABS, BLACK | 2 | PCS |
| 9 | EXPANDD | AQ-3-MS76001 | PET BALCK OD: 10mm | A/R | mm |
| 8 | MOLDING | AQ-3-GL10501 | PA BLACK | A/R | g |
| 7 | ACETATE TAPE | AQ-3-MS77001 | W=25±5mm | A/R | mm |
| 6 | PCB | AQ-3-MS31023 | MINISAS HD 4I PCB(A/B),PIN: AU 15u&30u,100±10 ohm | 4 | PCS |
| 5 | PCB | AQ-3-MS31022 | MINISAS HD 4I PCB(C/D),PIN: AU 15u&30u,100±10 ohm | 4 | PCS |
| 4 | COVER | AQ-3-MS64002 | MINISAS HD 8I COVER, PC BLACK | 1 | PCS |
| 3 | HOUSING | AQ-3-MS64001 | MINISAS HD 8I HOUSING, PC BLACK | 1 | PCS |
| 2 | CABLE | AQ-3-MS20101 | 30AWG CABLE | A/R | mm |
| 1 | CABLE | AQ-3-MS40207 | UL20744(32AWG*2C+2D)+AM,BLUE,85±5 ohm | A/R | mm |
| NO. | PART NAME | PART NO. | SPEC DESCRIPTION | QT'Y | UNIT |

| | | | | |
|-------------------------------|-----------------------|-----------|--|----------|
| A | INITIAL RELEASE | | | 13/03/02 |
| REV | DESCRIPTION OF CHANGE | | | DATE |
| TOLERANCE INCHES | | M/M | DIKWAN® DONGGGUAN AIQUN INDUSTRIAL CO., LTD. | |
| .X | .015 | .30 | SCALE | NONE |
| .XX | .010 | .10 | UNIT | MM |
| .XXX | .005 | .05 | SHEET | 1/1 |
| DRAWN BY | | TONY CHAN | COSTOMER: | |
| CHECK BY | | | DATE | 22/06/27 |
| | | | DWG NO.:AQ13-021 | |
| TITLE: MINI SAS HD 8i TD 2*4i | | | | |
| CUSTOMER. P/N: | | | P/N: AQ-1-MSB82010500 | |